

Features

- Fits 1/2" thru 24" nominal pipe sizes
(Consult ZOOK if using on TUBING)
- High visibility Chrome Yellow color
- Installs without tools
- Withstands severe weather conditions: rain, ice, snow and seals out insects, birds, nests, sand, dust and salt spray
- Eliminates equipment deterioration caused by external environment
- Reduces operating and repair costs – extending equipment life
- Visual indication of fugitive emissions
- Chemically resistant – will not shrink or discolor
- Non-toxic PVC construction blended with ultraviolet inhibitors
- Non-combustible
- Minimal interior pressure surge removes Pipe Guard from pipe
- Durable and reusable
- Five year guarantee against environmental degradation




Industries

- Petrochemical
- Pharmaceutical
- Transportation
- Off-shore platforms
- Oil and Gas exploration
- Food Processing
- Paper Mills

Applications

Protection of SRV, Rupture Disks, Manifold piping systems, Ductwork, Common header systems, Flame stacks, Storage tanks

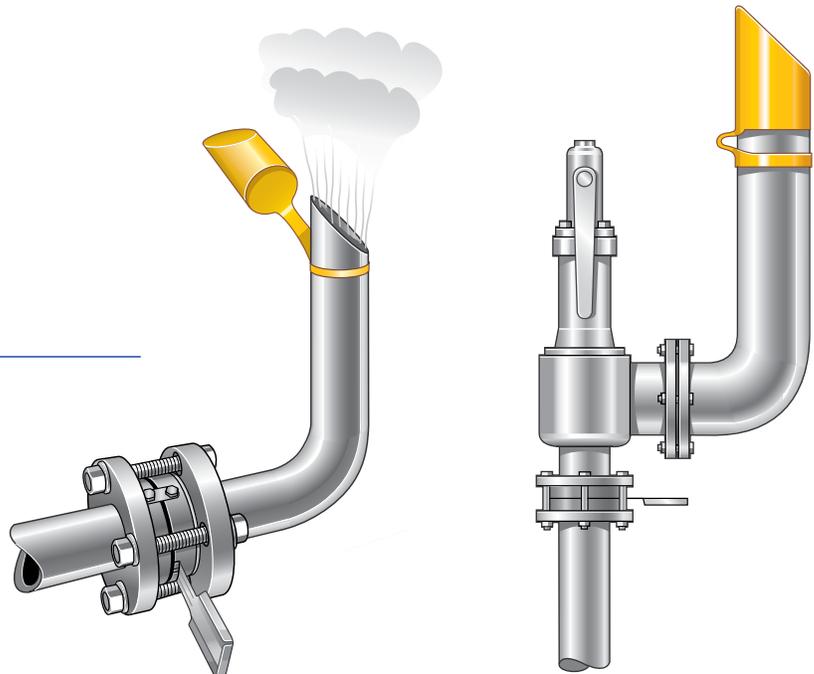

- Notes:**
- To open as required a PG should not be clamped or restrained other than by the standard lanyard which is included
 - PG Series Pipe Guard should not be used on applications where relieving pressures are less than 5 psi
 - PG Series is not recommended for use on PVC, Plastic, or Vinyl piping
 - PG Series cannot be used on vent piping that is installed to provide vacuum relief
 - ZOOK PG Series Pipe Guards are manufactured in accordance with the Code of Federal Regulation 49 192.199 (requirements for design of pressure relief and limiting devices).

PG Series - Most Frequently Asked Questions

1. What are the pressure limits of the PG Series Pipe Guard?

ZOOK recommends using the PG on applications where relieving pressures greater than 5 psi are expected. However, PVC solvents and acrylic or polymer paints applied to the exhaust pipe prior to installation of the PG, and not yet cured, is likely to cause bonding of the product to the pipe.

2. Is the PG Series Pipe Guard made in sizes larger than 14”?

Yes. Larger sizes require milling of special molds and addition of stiffeners within the PVC to prevent sagging of the 45° sloped top. Contact ZOOK for sizes larger than 14”.

3. What are the temperature limits of the PG Series Pipe Guard?

The PG functions remain consistent between temperatures of –100°F to 280°F.

4. Can the PG Series Pipe Guard be used on all vent piping?

NO. It is not recommended that the PG Series Pipe Guard be used on vent piping installed to provide vacuum relief to a process. The PG Series Pipe Guard should only be used on vent piping that vents positive pressures.

5. Will the lanyard device prevent loss of the PG as a result of a significant pressure surge?

YES. The lanyard restraint assures the customer that the PG Series Pipe Guard will remain on the exhaust pipe.

6. Is the PG Series Pipe Guard available with a flat top surface instead of the 45° angle top surface?

NO. The slope design sheds debris and precipitation, prevents sagging and deflects damaging environmental particles. The 45° slope contributes to extended product life and structural stability. The PG Series Pipe Guard offers the same protection when installed on a nipple with a 90° cut as one with the 45° cut.

7. Are PG Series Pipe Guards available without the lanyard attachment?

NO. However, the lanyard attachment may be easily removed.

8. Does exposure to high sulfur-content compounds affect the PG Series Pipe Guard?

NO. Due to a change in the chemical makeup of the PG Series Pipe Guard in June 1994 they no longer discolor when exposed to sulfur-containing compounds or environment.

9. Is the PG Series Pipe Guard available in any color other than Chrome Yellow?

YES. Chrome Yellow is the most vivid and highly visible color available. Our product may be special ordered* in other colors. Special order shipments will require at least 14 business days for shipping.

*Special Orders consist of any items without assigned part numbers.



PG_032023

zookdisk.com



SERVING AMERICA, CENTRAL & SOUTH AMERICA

16809 Park Circle Drive
Chagrin Falls, Ohio 44022
United States
Toll Free: +1 800 543 1043
Phone: +1 440 543 1010
E-mail: sales@zookdisk.com

SERVING EUROPE, MIDDLE EAST & AFRICA

Navigation House, Bridge St.
Killamarsh, Sheffield, S21 1AL
United Kingdom
Phone: +44 (0) 1909 560999
E-mail: sales.europe@zookdisk.com

SERVING CANADA

4400 South Service Road
Burlington, Ontario, L7L 5R8
Canada
Toll Free: +1 800 370 6057
Phone: +1 905 681 2885
E-mail: sales.canada@zookdisk.com

SERVING ASIA PACIFIC

Menara LGB TTD1
Unit 6-3A, Level 6, Menara LGB,
No. 1, Jalan Wan Kadir,
Taman Tun Dr. Ismail,
60000 Kuala Lumpur, Malaysia
Phone: +603 2706 0098
E-mail: sales.asia@zookdisk.com

Safety through knowledge and performance.