


The **ZAM series Alarm Monitor** is a surface mounted monitor designed to remotely detect the condition of a rupture disk in service. Used in conjunction with the ZOOK ZENSOR®, BA, RDI, BI or similar devices, it will immediately warn the operator of a ruptured disk. The alarm system uses a normally closed electrical circuit. When the disk ruptures, it breaks the circuit, triggering the alarm.

The ZOOK ZAM alarm system is capable of detecting a ruptured disk condition in applications involving highly electrically conductive fluids. Contact ZOOK for more information regarding this type of application.


Features

- Intrinsically safe output for Class I, II, and III, Division 1, Groups A, B, C, D, E, F, and G hazardous locations
- Utilizes FM approved, , , and , compliant I.S. barrier
- Enclosure: NEMA Type 12, constructed of 14 gauge steel with continuously welded seams and oil resistant seals
- Provides an audio/visual signal and an output relay for each channel. Channel will automatically reset once the burst indicating device is replaced or reset
- Audio alarm can be silenced with push button switch
- Contains front panel push buttons for testing each channel. This function can also be performed remotely
- Field replaceable I.S. barrier module and power supply


Specifications		
Intrinsically safe sensing signal level	10.5 VDC @ 13 mA max.	
Input Voltage	100–240 VAC @ 50/60Hz	
Monitor Sensing Level	Open (Ruptured)	
Output Relay Contacts	1NO & 1NC (DPST) rated 4 Amps, 126.5 VAC (Resistive)	
Operating Temperature	–4°F to + 140°F	
Dimensions	ZAM2 & ZAM4	12" H x 10" W x 8" D (300 mm x 250 mm x 200 mm)
	ZAM6 & ZAM8	14" H x 12" W x 8" D (350 mm x 300 mm x 200 mm)

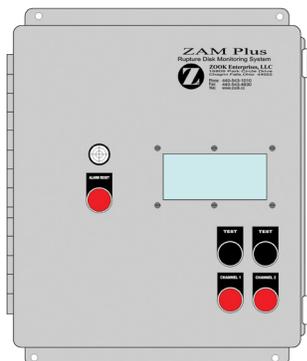


ZAM2
2 Channel Monitor

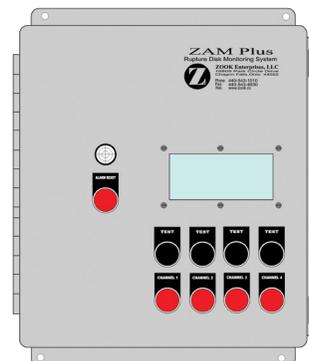

ZAM4
4 Channel Monitor

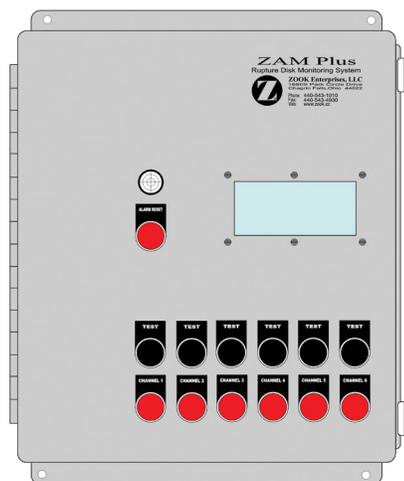

ZAM6
6 Channel Monitor

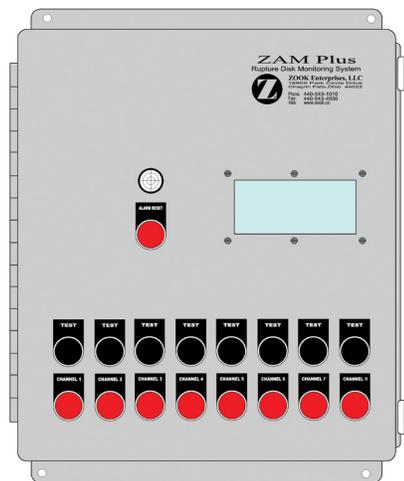

ZAM8
8 Channel Monitor

Rupture Disk Monitor Technical Information


Under normal conditions, the alarm system is in a normally closed state. When the disk ruptures due to an over pressure condition, separation of the membrane (pressure sensing portion of the rupture disk) occurs – breaking the alarm electrical circuit.

The monitor wired to the burst indicating device will be activated providing immediate local or remote warning of a ruptured disk. The ZAM monitor allows output to control pumps, valves, and other equipment which may be activated to control or shutdown a process.

The ZAM Alarm Monitor can be used with the following burst indicating devices: ZENSOR®, BA, RDI, BI or similar devices. It will immediately warn the operator of a ruptured disk.

Contact ZOOK for compatibility with other manufacturers indication devices.

Note: A rupture disk with burst indicating device is considered a simple device, therefore, approval is not required. Installation must be in accordance with ANSI/ISA RP12.6 and the NEC (ANSI/NFPA 70)

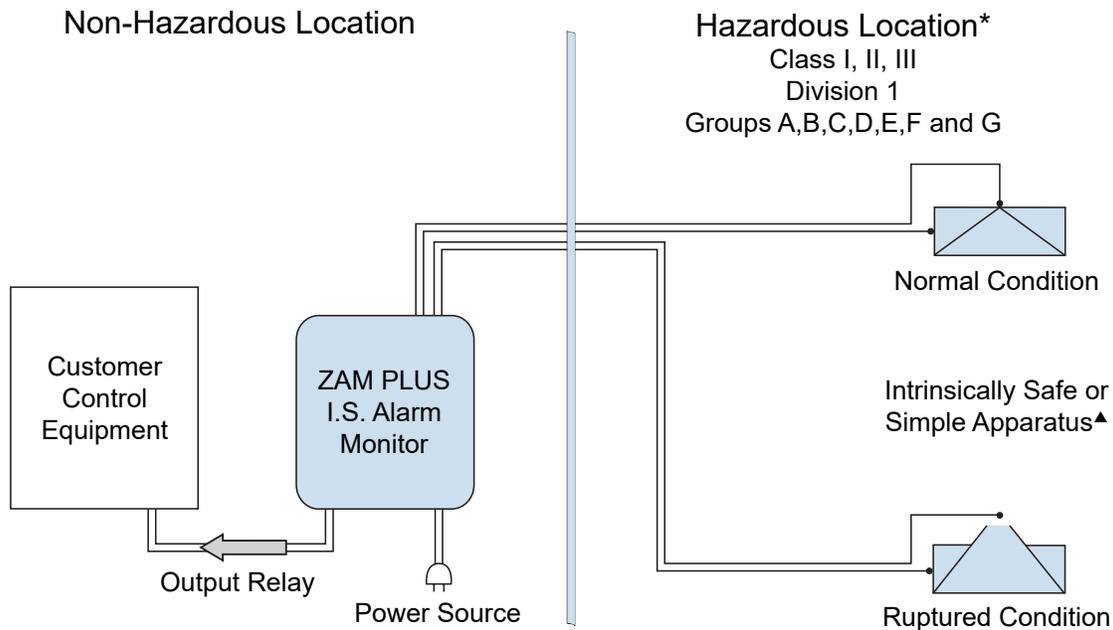

Notes:

*Contact ZOOK for information about mounting the ZAM Plus Alarm Monitor in hazardous locations.

▲Hazardous location equipment must be NEC compliant or simple apparatus.



ZAM-Plus_112022

zookdisk.com



SERVING AMERICA, CENTRAL & SOUTH AMERICA
16809 Park Circle Drive
Chagrin Falls, Ohio 44022
United States
Toll Free: +1 800 543 1043
Phone: +1 440 543 1010
E-mail: sales@zookdisk.com

SERVING EUROPE, MIDDLE EAST & AFRICA
Navigation House, Bridge St.
Killamarsh, Sheffield, S21 1AL
United Kingdom
Phone: +44 (0) 1909 560999
E-mail: sales.europe@zookdisk.com

SERVING CANADA
4400 South Service Road
Burlington, Ontario, L7L 5R8
Canada
Toll Free: +1 800 370 6057
Phone: +1 905 681 2885
E-mail: sales.canada@zookdisk.com

SERVING ASIA PACIFIC
Menara LGB TTD1
Unit 6-3A, Level 6, Menara LGB,
No. 1, Jalan Wan Kadir,
Taman Tun Dr. Ismail,
60000 Kuala Lumpur, Malaysia
Phone: +603 2706 0098
E-mail: sales.asia@zookdisk.com

Safety through knowledge and performance.