


### Features

- A Fail-Safe Design. If the disk is damaged or incorrectly installed, it will always burst at or below the marked burst rating as indicated on the disk tag
- Designed for Non-fragmentation
- Operating ratios up to 90% of the low end of burst tolerance
- Disk design offers high cycle life
- Excellent for liquid, gas or 2 phased flow
- Standard manufacturing design range and total tolerance ensures marked rating on disk tag does not exceed the MAWP of equipment
- Withstands full vacuum without vacuum support
- Wide range of standard and exotic materials available
- Sizes from 1/2" (13 mm) through 24" (610 mm)
- Burst ratings from 15 psig (1 barg) to 3600 psig (248.28 barg)
- Resists product build-up. The smooth concave side of the disk is exposed to the process media
- 3-dimensional stainless steel tag permanently engraved with complete disk specifications
- ASME UD, CE (PED), and TÜV compliance available



UHZ Disk Holder

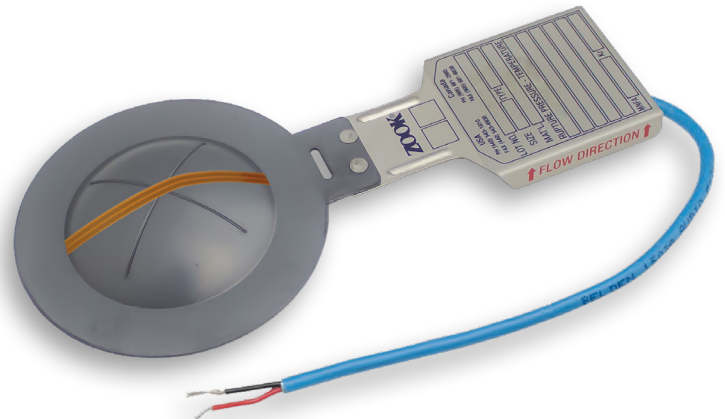


### Options

- SFAZ-L\*** A process side **PFA Teflon liner** provides protection from corrosive media
- SFAZ-BI\*** Equipped with ZOOK's Integral **Burst Indicator**

\*Note: The maximum temperature rating of rupture disks supplied with liners and BI's is lower than the base disk material

### Safety Relief Valve Protection

When a disk is mounted under a Safety Relief Valve, the working components of the valve are isolated from hostile environments.

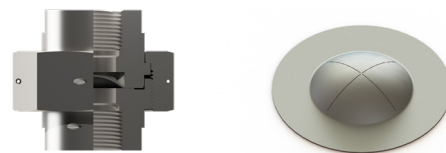

Contact ZOOK for Union options

# SFAZ Series Specifications

## Minimum and Maximum Pressure Ratings - psig (barg) @ 72°F (22°C)

Disk Size	Minimum Burst Pressure						SFAZ-L	SFAZ-BI	Maximum Burst Pressure	MNFA in <sup>2</sup> (mm <sup>2</sup> )	
	316	Inconel	Monel	Nickel	Hastelloy C276						
1/2"	200	200	200	200	300	Same as minimum material	Same as minimum material	3600	0.30		
13 mm	13.790	13.790	13.790	13.790	20.685			248.211	193		
3/4"	150	125	125	125	225			3600	0.53		
19 mm	10.343	8.619	8.619	8.619	15.514			248.211	341		
1"	110	110	100	79	165			3600	0.86		
25 mm	7.585	7.585	6.895	5.447	11.377			248.211	554		
1-1/2"	80	85	73	73	125			3600	2.04		
40 mm	5.516	5.861	5.034	5.034	8.619			248.211	1,316		
2"	61	70	65	61	102			3600	3.36		
50 mm	4.206	4.827	4.482	4.206	7.033			248.211	2,167		
2 1/2"	60	60	60	45	87			2159	4.79		
65 mm	4.137	4.137	4.137	3.103	5.999			148.857	3,090		
3"	60	60	60	45	87			2159	7.39		
80 mm	4.137	4.137	4.137	3.103	5.999			148.857	4,767		
4"	60	60	55	45	84			2159	12.73		
100 mm	4.137	4.137	3.793	3.103	5.792			148.857	8,212		
6"	60	60	55	45	96			1440	28.89		
150 mm	4.137	4.137	3.793	3.103	6.619			99.284	18,638		
8"	60	60	55	45	93			1440	50.03		
200 mm	4.137	4.137	3.793	3.103	6.413			99.284	32,277		
10"	72	72	60	45	111			1440	78.85		
250 mm	4.965	4.965	4.137	3.103	7.654			99.284	50,870		
12"	82	82	65	45	120			720	113.10		
300 mm	5.654	5.654	4.482	3.103	8.274			49.642	72,967		
Max. Temp.	900°F (482°C)	900°F (482°C)*	800°F (427°C)	750°F (399°C)	900°F (482°C)			500°F (260°C)	400°F (204°C)		

Notes: \* Contact ZOOK for higher temperatures

- For materials, sizes, burst ratings and temperatures not shown, contact ZOOK

Teflon liner may be added to provide additional protection against corrosive media

Requirements/Limitations when liner is added:

1. A protective ring is recommended
2. Max. Temperature of 500°F (260°C) – Limitations of liner material
3. Liner may be applied to all ratings. Contact ZOOK if liner is required on both sides of rupture disk
4. The maximum temperature rating of rupture disks supplied with liners and BI's is lower than the base disk material

## Manufacturing Design Range & Total Performance Tolerance

ASME						PED				
Burst Pressure (psig)		Manufacturing Design Range			Burst Tolerance	Burst Pressure (barg)		Total Performance Tolerance		
Minimum	Maximum	Good	Better	Best		Minimum	Maximum	Good	Better	Best
1.0	<2.5	-10%	-5%	-0%	±0.33 psig	0.069	<0.172	±50%	-	±0.023 barg
2.5	<5.0	-10%	-5%	-0%	±0.5 psig	0.172	<0.345	±30%	±25%	±0.035 barg
5.0	<7.0	-10%	-5%	-0%	±0.5 psig	0.345	<0.483	±20%	±17.5%	±0.035 barg
7.0	<11.0	-10%	-5%	-0%	±0.8 psig	0.483	<0.759	±20%	±15%	±0.055 barg
11.0	<15	-10%	-5%	-0%	±1.3 psig	0.759	<1.034	±20%	±15%	±0.090 barg
15.0	<26	-10%	-5%	-0%	±2.0 psig	1.034	<1.793	±20%	±15%	±0.138 barg
26.0	<40	-10%	-5%	-0%	±2.0 psig	1.793	<2.758	±15%	±12.5%	±0.138 barg
40.0	Max	-10%	-5%	-0%	±5%	2.758	Max	±10%	±7.5%	±5%

Note: Burst tolerances are the maximum expected variation from the disk's marked burst pressure

## Certified Flow Resistance Factors

Krl (Liquid)	Krg (Gas)
1.78	0.39

Teflon - Trademark of The Chemours Company  
 Inconel - Trademark of Special Metals Corporation  
 Monel - Trademark of Special Metals Corporation  
 Hastelloy - Trademark of Haynes International



SFAZ\_082023

[zookdisk.com](http://zookdisk.com)



**SERVING AMERICA, CENTRAL & SOUTH AMERICA**  
 16809 Park Circle Drive  
 Chagrin Falls, Ohio 44022  
 United States  
 Toll Free: +1 800 543 1043  
 Phone: +1 440 543 1010  
 E-mail: [sales@zookdisk.com](mailto:sales@zookdisk.com)

**SERVING EUROPE, MIDDLE EAST & AFRICA**  
 Navigation House, Bridge St.  
 Killamarsh, Sheffield, S21 1AL  
 United Kingdom  
 Phone: +44 (0) 1909 560999  
 E-mail: [sales.europe@zookdisk.com](mailto:sales.europe@zookdisk.com)

**SERVING CANADA**  
 4400 South Service Road  
 Burlington, Ontario, L7L 5R8  
 Canada  
 Toll Free: +1 800 370 6057  
 Phone: +1 905 681 2885  
 E-mail: [sales.canada@zookdisk.com](mailto:sales.canada@zookdisk.com)

**SERVING ASIA PACIFIC**  
 Menara LGB TTDI  
 Unit 6-3A, Level 6, Menara LGB,  
 No. 1, Jalan Wan Kadir,  
 Taman Tun Dr. Ismail,  
 60000 Kuala Lumpur, Malaysia  
 Phone: +603 2706 0098  
 E-mail: [sales.asia@zookdisk.com](mailto:sales.asia@zookdisk.com)

Safety through knowledge and performance.