



FDZ Series disk mounts into UHZ Series disk holder (refer to UHZ Series data sheet)

Features

- The FDZ Series is a slotted metal top section and allows the use of metal & Teflon seal materials. A wide variety of corrosive resistant seal materials are available
- State-of-the-art laser slotted metal burst cap
- Operating ratios up to 85% of the low end of burst tolerance
- Disk design offers high cycle life
- Excellent for liquid, gas or 2 phased flow
- Wide range of standard and exotic materials available
- Sizes from 1/2" (13mm) through 30" (750mm)
- Burst ratings from 3 psig (0.21 barg) to 2500 psig (172.37 barg)
- 3-dimensional stainless steel tag permanently engraved with complete disk specifications
- CE (PED), and TÜV compliance available


Options

FDZ-V* **Vacuum Supports** are required on vacuum services. Vacuum supports are attached to the process side of the disk and allow the disk to support a full system vacuum

FDZ-R* **Protective Rings** are recommended with FDZ Series disks to protect delicate materials and/or to provide stability when vacuum supports are not supplied

FDZ-H* **Handling Supports** are attached to the process side of the disk to protect disk seals when vacuum supports are not supplied

FDZ-BI* Equipped with ZOOK's Integral **Burst Indicator**

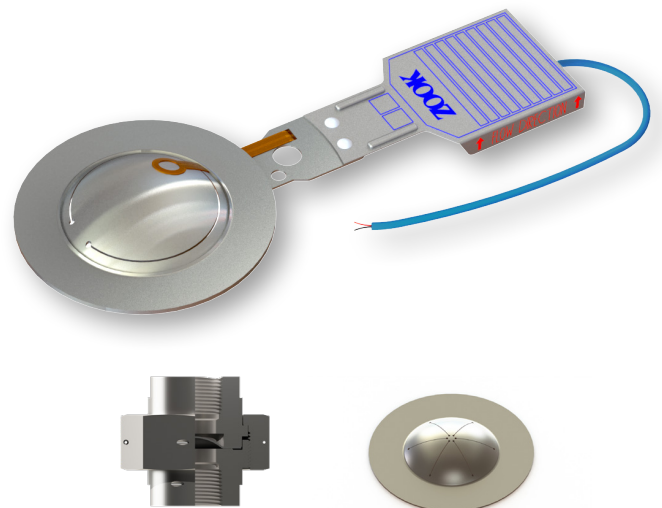

*Note: The maximum temperature rating of rupture disks supplied with liners and BI's is lower than the base disk material

Contact ZOOK for Union options

FDZ Series Specifications

Minimum and Maximum Pressure Ratings - psig (barg) @ 72°F (22°C)

Disk Size	Minimum Burst Pressures with Listed Seal Materials									
	Burst Cap Materials: 316, Inconel, Monel, Nickel or Hastelloy C276							Maximum Burst Pressure	MNFA in ² (mm ²)	
	316	Inconel	Monel	Nickel	Hastelloy C276	Aluminum	PFA Teflon		FDZ	FDZ-V FDZ-V-BI FDZ-BI
1/2"	1100	880	600	540	1100	140	90	2500	0.30	0.18
13 mm	75.843	60.674	41.369	37.232	75.843	9.653	6.206	172.368	193	116
3/4"	800	700	460	440	800	110	60	2500	0.53	0.49
20 mm	55.159	48.264	31.716	30.337	55.159	7.585	4.137	172.368	341	316
1"	400	300	240	185	400	60	25	2500	0.86	0.77
25 mm	27.580	20.685	16.548	12.756	27.580	4.137	1.724	172.368	554	496
1-1/2"	275	200	155	125	275	35	20	2000	2.04	1.68
40 mm	18.961	13.790	10.687	8.619	18.961	2.414	1.379	137.895	1316	1083
2"	165	120	90	80	165	25	15	1500	3.36	3.23
50 mm	11.377	8.274	6.206	5.516	11.377	1.724	1.035	103.421	2167	2083
2-1/2"	145	105	80	65	145	20	13	1250	4.79	4.16
65 mm	9.998	7.240	5.516	4.482	9.998	1.379	0.897	86.184	3090	2683
3"	125	95	70	55	125	15	10	1000	7.39	6.34
80 mm	8.619	6.551	4.827	3.793	8.619	1.035	0.690	68.947	4767	4090
4"	90	75	50	40	90	12	8	900	12.73	10.30
100 mm	6.206	5.172	3.448	2.758	6.206	0.828	0.552	62.052	8212	6645
6"	75	60	40	35	75	10	6	700	28.89	24.31
150 mm	5.172	4.137	2.758	2.414	5.172	0.690	0.414	48.263	18638	15683
8"	60	40	35	25	60	8	5	600	50.03	38.34
200 mm	4.137	2.758	2.414	1.724	4.137	0.552	0.345	41.368	32277	24735
10"	45	30	30	22	45	7	4	500	78.85	67.52
250 mm	3.103	2.069	2.069	1.517	3.103	0.483	0.276	34.473	50870	43561
12"	40	25	25	19	40	7	3	400	113.10	90.08
300 mm	2.758	1.724	1.724	1.311	2.758	0.483	0.207	27.579	72967	58116
Max. Temp.	900°F (482°C)	900°F (482°C)*	800°F (427°C)	750°F (399°C)	900°F (482°C)	600°F (316°C)	500°F (260°C)			

Notes: * Contact ZOOK for higher temperatures

• For materials, sizes, burst ratings and temperatures not shown, contact ZOOK

Table Tolerance

Table Tolerance - ZOOK										Table Tolerance - PED							
Burst Pressure Range (psig)		ZOOK Manufacturing Design Range (psig)								Burst Tolerance	Burst Pressure Range (barg)		Total Performance Tolerance				
		Standard		Reduced Tolerance				Minimum	Maximum				Standard	Reduced Tolerance			
Minimum	Maximum	Minus	Plus	Minus	Plus	Minus	Plus			Minus	Plus	Minimum		Maximum	Standard	Good	Better
Min	<1.0	0	0.3	0.00	0.15	0.00	0.08	0.00	0.00	± 0.25 psig	Min	<0.069	±75%	±73%	±70%	±0.017 barg	
1.0	<2.5	0.5	0.5	0.25	0.25	0.13	0.13	0.00	0.00	± 0.33 psig	0.069	<0.172	±65%	±45%	±35%	±0.023 barg	
2.5	<4.0	1	1	0.50	0.50	0.25	0.25	0.00	0.00	± 0.5 psig	0.172	<0.276	±50%	±30%	±20%	±0.035 barg	
4.0	<7.0	1	2	0.50	1.00	0.25	0.50	0.00	0.00	± 0.5 psig	0.276	<0.483	±50%	±30%	±20%	±0.035 barg	
7.0	<11.0	1.5	2.5	0.75	1.25	0.38	0.63	0.00	0.00	± 0.8 psig	0.483	<0.759	±50%	±30%	±20%	±0.055 barg	
11.0	<15.0	2	3	1.00	1.50	0.50	0.75	0.00	0.00	± 1.3 psig	0.759	<1.034	±25%	±20%	±15%	±0.090 barg	
15.0	<17	2	3	1.00	1.50	0.50	0.75	0.00	0.00	± 2.0 psig	1.034	<1.172	±25%	±20%	±15%	±0.138 barg	
17	<26	2	4	1.00	2.00	0.50	1.00	0.00	0.00	± 2.0 psig	1.172	<1.793	±25%	±20%	±15%	±0.138 barg	
26	<40	3	5	1.50	2.50	0.75	1.25	0.00	0.00	± 2.0 psig	1.793	<2.758	±20%	±15%	±10%	±0.138 barg	
40	<66	4	6	2.00	3.00	1.00	1.50	0.00	0.00	± 5%	2.758	<4.552	±15%	±10%	±7.5%	±5%	
66	<101	5	9	2.50	4.50	1.25	2.25	0.00	0.00	± 5%	4.552	<6.966	±15%	±10%	±7.5%	±5%	
101	<151	6	12	3.00	6.00	1.50	3.00	0.00	0.00	± 5%	6.966	<10.412	±10%	±7.5%	±6.5%	±5%	
151	<201	9	16	4.50	8.00	2.25	4.00	0.00	0.00	± 5%	10.412	<13.859	±10%	±7.5%	±6.5%	±5%	
201	<351	12	23	6.00	11.50	3.00	5.75	0.00	0.00	± 5%	13.859	<24.201	±10%	±7.5%	±6.5%	±5%	
351	<500	15	30	7.50	15.00	3.75	7.50	0.00	0.00	± 5%	24.201	<34.474	±10%	±7.5%	±6.5%	±5%	
500	Max	3%	6%	1.5%	3.0%	0.75%	1.5%	0.00	0.00	± 5%	34.474	Max	±10%	±7.5%	±6.5%	±5%	

Teflon - Trademark of The Chemours Company
 Inconel - Trademark of Special Metals Corporation
 Monel - Trademark of Special Metals Corporation
 Hastelloy - Trademark of Haynes International



FDZ_042023

zookdisk.com



SERVING AMERICA, CENTRAL & SOUTH AMERICA
 16809 Park Circle Drive
 Chagrin Falls, Ohio 44022
 United States
 Toll Free: +1 800 543 1043
 Phone: +1 440 543 1010
 E-mail: sales@zookdisk.com

SERVING EUROPE, MIDDLE EAST & AFRICA
 Navigation House, Bridge St.
 Killamarsh, Sheffield, S21 1AL
 United Kingdom
 Phone: +44 (0) 1909 560999
 E-mail: sales.europe@zookdisk.com

SERVING CANADA
 4400 South Service Road
 Burlington, Ontario, L7L 5R8
 Canada
 Toll Free: +1 800 370 6057
 Phone: +1 905 681 2885
 E-mail: sales.canada@zookdisk.com

SERVING ASIA PACIFIC
 Menara LGB TTDI
 Unit 6-3A, Level 6, Menara LGB,
 No. 1, Jalan Wan Kadir,
 Taman Tun Dr. Ismail,
 60000 Kuala Lumpur, Malaysia
 Phone: +603 2706 0098
 E-mail: sales.asia@zookdisk.com

Safety through knowledge and performance.